

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 756 318 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
29.01.1997 Bulletin 1997/05

(51) Int. Cl.<sup>6</sup>: H01L 21/66

(21) Application number: 95480099.1

(22) Date of filing: 24.07.1995

(84) Designated Contracting States:  
DE FR GB

(71) Applicants:  
• International Business Machines Corporation  
Armonk, N.Y. 10504 (US)  
• SOFIE INSTRUMENTS  
F-91290 Arpaion (FR)

(72) Inventors:

• Cantaloup, Jean  
F-91310 Montlhéry (FR)  
• Coronel, Philippe  
F-91300 Massy (FR)

(74) Representative: Klein, Daniel Jacques Henri  
Compagnie IBM France  
Département de Propriété Intellectuelle  
06610 La Gaude (FR)

M. Ke,  
As promised  
for

## (54) Method for real-time in-situ monitoring of a trench formation process

(57) In the manufacturing of 16 Mbit DRAM chips, the deep trench formation process in a silicon wafer by plasma etching is a very critical step when the etching gas includes O<sub>2</sub> (e.g. in a standard HBr-NF<sub>3</sub> chemistry). As a result, the monitoring of the trench formation process and thus the etch end point determination is quite difficult. The disclosed monitoring method is based on zero order interferometry. The wafer is placed in a plasma etcher (57) and a plasma is created (58). A large area of the wafer is illuminated (59) through a view port by a radiation of a specified wavelength at a normal angle of incidence. The reflected light is collected then applied (60) to a spectrometer to generate a primary signal S of the interferometric type. Next, this signal is applied in parallel to two filters (61). A low-pass filter produces a first secondary signal S1 that contains data related to the deposition rate and the redeposited layer thickness. A band-pass filter produces a second secondary signal S2 that contains data related to the trench etch rate and depth. The band-pass filter is centered around the fundamental frequency of the interferometry phenomenon. These filtered signals are monitored (62) as standard and the trench formation parameters such as the SiO<sub>2</sub> redeposited layer thickness and the trench depth are accurately measured in real time to allow an accurate determination of the etch end point (63). It is worthwhile to have the optical emission of the plasma viewed by another spectrometer to generate a second primary signal S\* that is used to validate the parameter measurements (59', 60', 61').

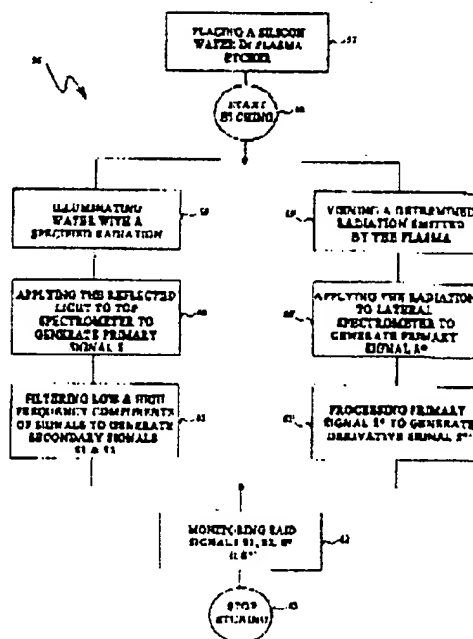


Fig. 13

EP 0 756 318 A1